

Reliable switching of sensors, motors and solenoid valves

Let's connect.

Relay modules and solid-state relays



D-SERIES

DRI/DRM relay KITS

The DRI/DRM relay modules are particularly convenient to use. The kits are delivered fully assembled and 100% function-tested. This saves assembly time and reduces the number of parts required.

- Assembled kit comprising relay, base and retaining clip, incl. labelling plate
- 100% function-tested
- 100% check of the dielectric strength at input/output
- Optional: test button with coloured control voltage marking (AC coil: red / DC coil: blue) and mechanical switch position indicator
- Bright status LED (AC coil: red, DC coil: green)



D-SERIES DRI relay KITS 1 CO (10 A) and 2 CO (5 A)						
Load side	Base	24 V DC		24 V AC		230 V AC
1 CO, 10 A	Screw	2476680000	DRIKIT 24VDC 1CO LD	2476710000	DRIKIT 24VAC 1CO LD	2476730000 DRIKIT 230VAC 1CO LD
1 CO, 10 A	PUSH IN	2576220000	DRIKITP 24VDC 1CO LD	2576260000	DRIKITP 24VAC 1CO LD	2576280000 DRIKITP 230VAC 1CO LD
1 CO, 10 A / test button	Screw	2476750000	DRIKIT 24VDC 1CO LD/PB	2476780000	DRIKIT 24VAC 1CO LD/PB	2476800000 DRIKIT 230VAC 1CO LD/PB
1 CO, 10 A / test button	PUSH IN	2576210000	DRIKITP 24VDC 1CO LD/PB	2576250000	DRIKITP 24VAC 1CO LD/PB	2576160000 DRIKITP230VAC 1CO LD/PB
2 CO, 5 A	Screw	2476820000	DRIKIT 24VDC 2CO LD	2476850000	DRIKIT 24VAC 2CO LD	2476870000 DRIKIT 230VAC 2CO LD
2 CO, 5 A	PUSH IN	2576200000	DRIKITP 24VDC 2CO LD	2576240000	DRIKITP 24VAC 2CO LD	2576270000 DRIKITP 230VAC 2CO LD
2 CO, 5 A / test button	Screw	2472890000	DRIKIT 24VDC 2CO LD/PB	2476920000	DRIKIT 24VAC 2CO LD/PB	2476940000 DRIKIT 230VAC 2CO LD/PB
2 CO, 5 A / test button	PUSH IN	2576190000	DRIKITP 24VDC 2CO LD/PB	2576230000	DRIKITP 24VAC 2CO LD/PB	2576150000 DRIKITP230VAC 2CO LD/PB



D-SERIES DRM relay KITS 2 CO (10 A) and 4 CO (5 A)						
Load side	Base	24 V DC		24 V AC		230 V AC
2 CO, 10 A	Screw	1542360000	DRMKIT 24VDC 2CO LD	1542380000	DRMKIT 24VAC 2CO LD	1542390000 DRMKIT 230VAC 2CO LD
2 CO, 10 A	PUSH IN	2576110000	DRMKITP 24VDC 2CO LD	2576070000	DRMKITP 24VAC 2CO LD	2576030000 DRMKITP 230VAC 2CO LD
2 CO, 10 A / test button	Screw	1542460000	DRMKIT 24VDC 2CO LD/PB	1542480000	DRMKIT 24VAC 2CO LD/PB	1542490000 DRMKIT 230VAC 2CO LD/PB
2 CO, 10 A / test button	PUSH IN	2576120000	DRMKITP 24VDC 2CO LD/PB	2576080000	DRMKITP 24VAC 2CO LD/PB	2576040000 DRMKITP230VAC 2CO LD/PB
4 CO, 5 A	Screw	1542410000	DRMKIT 24VDC 4CO LD	1542430000	DRMKIT 24VAC 4CO LD	1542450000 DRMKIT 230VAC 4CO LD
4 CO, 5 A	PUSH IN	2576130000	DRMKITP 24VDC 4CO LD	2576090000	DRMKITP 24VAC 4CO LD	2576050000 DRMKITP 230VAC 4CO LD
4 CO, 5 A / test button	Screw	1542510000	DRMKIT 24VDC 4CO LD/PB	1542530000	DRMKIT 24VAC 4CO LD/PB	1542540000 DRMKIT 230VAC 4CO LD/PB
4 CO, 5 A / test button	PUSH IN	2576140000	DRMKITP 24VDC 4CO LD/PB	2576100000	DRMKITP 24VAC 4CO LD/PB	2576060000 DRMKITP230VAC 4CO LD/PB



You can find further products at catalogue.weidmueller.com

D-SERIES

DRM plug-in relays and accessories



The DRM relays offer a compact design combined with high switching capacity. They are available in variations with 2 and 4 CO contacts.

Additional features include:

- Strengthened plug-in contacts
- Optional test button (AC red, DC blue)
- Optional with integrated status display (AC red, DC green) and/or free-wheeling diode.

Thanks to extensive accessories such as the relay base in PUSH IN and screw connection, pluggable protective circuits and cross-connections as well as plastic/metal retaining clips, the relay components can be used in diverse industrial applications.

D-SERIES DRM plug-in relay 2 CO (10 A) and 4 CO (5 A)						
Load side/protective circuit	24 V DC		24 V AC		230 V AC	
2 CO, 10 A	7760056051	DRM270024	7760056055	DRM270524	7760056058	DRM270730
2 CO, 10 A / LED	7760056060	DRM270024L	7760056064	DRM270524L	7760056067	DRM270730L
2 CO, 10 A / LED + test button	7760056069	DRM270024LT	7760056073	DRM270524LT	7760056076	DRM270730LT
2 CO, 10 A / LED + free-wheeling diode	7760056077	DRM270024LD				
4 CO, 5 A	7760056079	DRM570024	7760056083	DRM570524	7760056086	DRM570730
4 CO, 5 A / LED	7760056088	DRM570024L	7760056092	DRM570524L	7760056095	DRM570730L
4 CO, 5 A / LED + test button	7760056097	DRM570024LT	7760056101	DRM570524LT	7760056104	DRM570730LT
4 CO, 5 A / LED + free-wheeling diode	7760056105	DRM570024LD				



Relay base and accessories for D-SERIES DRM plug-in relays				
Relay base/accessories	Screw connection		PUSH IN	
2 CO	7760056263	SCM 2CO ECO	7760056362	SCM 2CO P
4 CO	7760056264	SCM 4CO ECO	7760056363	SCM 4CO P
Plastic retaining clip with marker holder	7760056367 SCM CLIP P			
Metal retaining clip	7760056108 DRM/DRL CLIP M			
Cross-connection	1132080000	SCM-I QV S	7760056366	SCM/SDI P CC



LED/protection modules for D-SERIES DRI and D-SERIES DRM						
Function of module	24 V DC		24 V AC		230 V AC	
Free-wheeling diode	7760056169	RIM 1 6/230VDC				
LED green + free-wheeling diode	7760056015	RIM 2 6/24VDC				
green LED			7940018457	RIM 3 6/24VUC	7940018455	RIM 3 110/230VUC
RC element 110...230 V AC 4.7 kΩ/10 nF					7760056014	RIM 3 110/230VAC
RC element 110...230 V AC 100 kΩ/220 nF					7760056045	RIM 3 110/230VAC LED



You can find further products at catalogue.weidmueller.com


D-SERIES

DRI plug-in relay and accessories

As handling in practice plays an increasingly important role, the DRI relays have particularly stable plug contacts for quick and safe mounting.

The optional test button with colour coding and locking function to detect manipulations, can be actuated without tools. The large status LED clearly indicates the switching state.

Thanks to extensive accessories such as the relay base in PUSH IN and screw connection, pluggable protective circuits and cross-connections as well as plastic/metal retaining clips, the relay components can be used in diverse industrial applications.

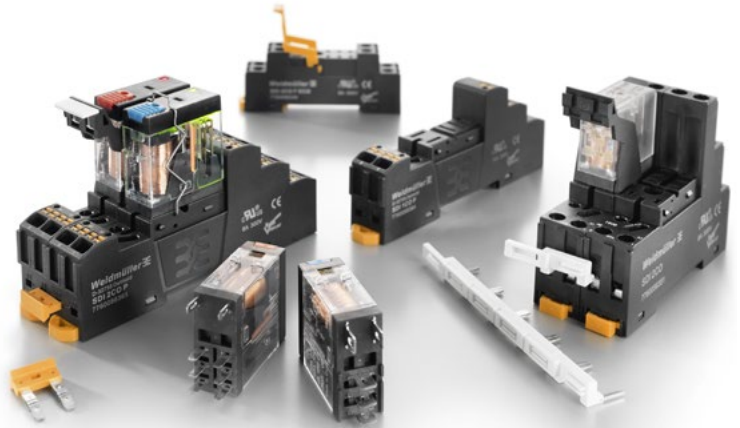

D-SERIES DRI plug-in relay 1 CO (10 A) and 2 CO (5 A)

Load side/protective circuit	24 V DC		24 V AC		230 V AC	
1 CO, 1 x 10 A	7760056297	DRI314024	7760056300	DRI314524	7760056302	DRI314730
1 CO, 1 x 10 A / LED	7760056304	DRI314024L	7760056307	DRI314524L	7760056309	DRI314730L
1 CO, 1 x 10 A / LED + test button			7760056318	DRI314524LT	7760056320	DRI314730LT
1 CO, 1 x 10 A / LED + free-wheeling diode	7760056311	DRI314024LD				
1 CO, 1 x 10 A / LED + free-wheeling diode + test button	7760056315	DRI314024LTD				
2 CO, 2 x 5 A	7760056322	DRI424024	7760056325	DRI424524	7760056327	DRI424730
2 CO, 2 x 5 A / LED	7760056329	DRI424024L	7760056332	DRI424524L	7760056334	DRI424730L
2 CO, 2 x 5 A / LED + test button			7760056343	DRI424524LT	7760056345	DRI424730LT
2 CO, 2 x 5 A / LED + free-wheeling diode	7760056336	DRI424024LD				
2 CO, 2 x 5 A / LED + free-wheeling diode + test button	7760056340	DRI424024LTD				



Relay base and accessory for D-SERIES DRI plug-in relays

Relay base/accessories	Screw connection		PUSH IN	
1 CO	7760056350	SDI 1CO	7760056364	SDI 1CO P
2 CO	7760056351	SDI 2CO	7760056365	SDI 2CO P
Plastic retaining clip with marker holder	7760056389 SDI CLIP P			
Metal retaining clip for relays without test button	7760056368 SDI CLIP LM			
Metal retaining clip for relays with test button	7760056390 SDI CLIP HM			
Cross-connection	1132070000	SRC-1 QV S	7760056366	SCM/SDI P CC



LED/protection modules for D-SERIES DRI and D-SERIES DRM


Function of module	24 V DC		24 V AC		230 V AC	
Free-wheeling diode	7760056169	RIM 1 6/230VDC				
LED green + free-wheeling diode	7760056015	RIM 2 6/24VDC				
green LED			7940018457	RIM 3 6/24VUC	7940018455	RIM 3 110/230VUC
RC element 110...230 V AC 4.7 kΩ / 10 nF					7760056014	RIM 3 110/230VAC
RC element 110...230VAC 100 kΩ / 220 nF					7760056045	RIM 3 110/230VAC LED



You can find further products at catalogue.weidmueller.com

TERMSERIES

Relay modules

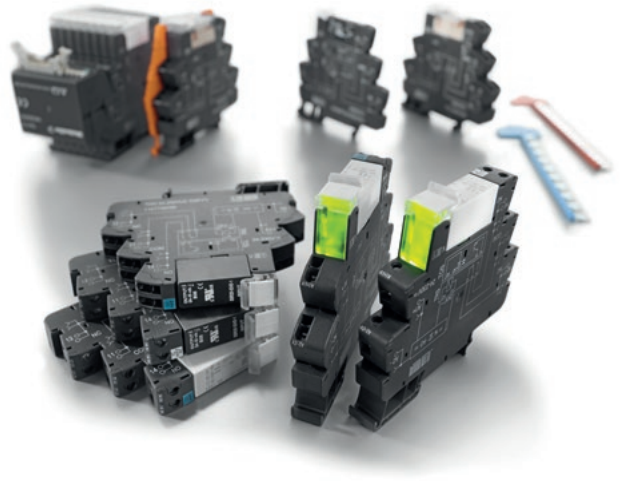

With the compact relay modules from the TERMSERIES, you can switch electrical loads in all applications. Thanks to the compact design measuring 6.4 or 12.8 mm, the installation space in the control cabinet is minimised. Extensive accessories such as pluggable cross-connections, markings, supply terminals and partition plates complete the TERMSERIES relay module programme comprising of relay and base with integrated electronic pre-circuit for AC / DC and UC control voltage:

- With screw and tension-clamp connection
- Optional AgNi, AgNi 5 µm AU or AgSnO contacts
- 1 CO contact (6 A or 16 A) or 2 CO contacts (8 A)
- Optionally with multi-voltage input 24...230 V AC/DC
- Protective circuits in input circuit (free-wheeling diode, RC element)

TERMSERIES – relay modules 1 CO (6 A), 1 CO (16 A), 2 CO (8 A)									
Load side/width	Base	24 V DC		24...230 V AC DC		24 V AC / DC		230 V AC / DC	
1 CO, 6 A / 6.4 mm	Screw	1122770000	TRS 24VDC 1CO	1122780000	TRS 24VUC 1CO	1122840000	TRS 230VAC RC 1CO	1122850000	TRS 24-230VUC 1CO
1 CO, 6 A / 6.4 mm	Tension clamp	1122880000	TRZ 24VDC 1CO	1122890000	TRZ 24VUC 1CO	1122950000	TRZ 230VAC RC 1CO	1122970000	TRZ 24-230VUC 1CO
1 CO, 6 A Au / 6.4 mm	Screw	1123000000	TRS 24VDC 1CO AU	1123010000	TRS 24VUC 1CO AU	1123080000	TRS 230VAC RC 1CO AU	1123090000	TRS 24-230VUC 1CO AU
1 CO, 6 A Au / 6.4 mm	Tension clamp	1123120000	TRZ 24VDC 1CO AU	1123130000	TRZ 24VUC 1CO AU	1123200000	TRZ 230VAC RC 1CO AU	1123210000	TRZ 24-230VUC 1CO AU
1 CO, 6 A / 6.4 mm	Screw	1984540000	TRS 24VDC 1CO AGSNO	2152940000	TRS 24VUC 1CO AGSNO	2152920000	TRS 230VAC RC 1CO AGSNO	2154970000	TRS 24-230VUC 1CO AGSNO
1 CO, 6 A / 6.4 mm	Tension clamp	1984550000	TRZ 24VDC 1CO AGSNO	2152970000	TRZ 24VUC 1CO AGSNO	2152930000	TRZ 230VAC RC 1CO AGSNO	2154980000	TRZ 24-230VUC 1CO AGSNO
1 CO, 16 A / 12.8 mm	Screw	1479680000	TRS 24VDC 1CO 16A	1479690000	TRS 24VUC 1CO 16A	1479760000	TRS 230VAC RC 1CO 16A	1479770000	TRS 24-230VUC 1CO 16A
1 CO, 16 A / 12.8 mm	Tension clamp	1479840000	TRZ 24VDC 1CO 16A	1479850000	TRZ 24VUC 1CO 16A	1479920000	TRZ 230VAC RC 1CO 16A	1479930000	TRZ 24-230VUC 1CO 16A
1 CO, 16 A / 12.8 mm	Screw	1479780000	TRS 24VDC 1NO HC	special relay for switching loads (80 A@20 ms)				1479790000	TRS 24-230VUC 1NO HC
1 CO, 16 A / 12.8 mm	Tension clamp	1479940000	TRZ 24VDC 1NO HC					1479950000	TRZ 24-230VUC 1NO HC
1 CO, 16 A / 12.8 mm	Screw	1479810000	TRS 24VDC 1NO HCP	special relay for switching capacitive loads (165 A, 20 ms)				1479830000	TRS 24-230VUC 1NO HCP
1 CO, 16 A / 12.8 mm	Tension clamp	1479970000	TRZ 24VDC 1NO HCP					1479980000	TRZ 24-230VUC 1NO HCP
2 CO, 8 A / 12.8 mm	Screw	1123490000	TRS 24VDC 2CO	1123500000	TRS 24VUC 2CO	1123500000	TRS 24VUC 2CO	1123580000	TRS 24-230VUC 2CO
2 CO, 8 A / 12.8 mm	Tension clamp	1123610000	TRZ 24VDC 2CO	1123620000	TRZ 24VUC 2CO	1123620000	TRZ 24VUC 2CO	1123700000	TRZ 24-230VUC 2CO
2 CO, 8 A Au / 12.8 mm	Screw	1123730000	TRS 24VDC 2CO AU	1123740000	TRS 24VUC 2CO AU	1123740000	TRS 24VUC 2CO AU	1123820000	TRS 24-230VUC 2CO AU
2 CO, 8 A Au / 12.8 mm	Tension clamp	1123850000	TRZ 24VDC 2CO AU	1123870000	TRZ 24VUC 2CO AU	1123870000	TRZ 24VUC 2CO AU	1123940000	TRZ 24-230VUC 2CO AU

TERMSERIES accessories					
	Screw connection		Tension clamp connection		
Supply terminal	1240780000	TXS SUPPLY	1240790000	TXZ SUPPLY	
Partition plate	1240800000 TW TXS/TXZ R3.2				
Markers	1818400000 WS 10/6 M MC NE WS				
Cross-connection	Yellow insulation		Red insulation		Blue insulation
2-pole for width 6.4 mm	1193670000	ZQV 1.5N/R6.4/2 GE	1446090000	ZQV 1.5N/R6.4/2 RT	1446140000 ZQV 1.5N/R6.4/2 BL
10-pole for width 6.4 mm	1193680000	ZQV 1.5N/R6.4/10 GE	1391640000	ZQV 1.5N/R6.4/10 RT	1390350000 ZQV 1.5N/R6.4/10 BL
19-pole for width 6.4 mm	1193690000	ZQV 1.5N/R6.4/19 GE	1391610000	ZQV 1.5N/R6.4/19 RT	1391620000 ZQV 1.5N/R6.4/19 BL
10-pole for width 12.8 mm	1193700000	ZQV 1.5N/R12.8/10 GE	1445950000	ZQV 1.5N/R12.8/10 RT	1445970000 ZQV 1.5N/R12.8/10 BL


You can find further products at catalogue.weidmuller.com

RIDERSERIES


RCI/RCM RELAY KITS

The relay kits from the RCI and RCM family are particularly convenient to use. They are available with 1 to 4 CO contacts in a screw and PUSH IN connection. The lockable test button simplifies commissioning and service work.

- Assembled kit comprising relay, base and retaining clip, incl. labelling plate
- 100% function-tested
- 100% check of the dielectric strength at input/output
- Optional: Test button with mechanical switch position indicator
- Bright status LED (AC coil: red, DC coil: green)

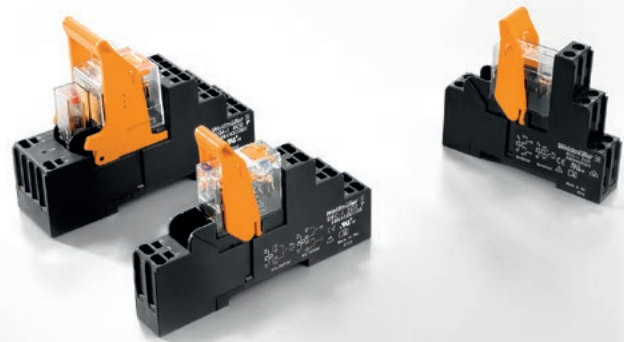

RIDERSERIES RCI relay KITS 1 CO (16 A) and 2 CO (8 A)							
Load side	Base	24 V DC		24 V AC		230 V AC	
1 CO, 16A	Screw	887100000	RCIKIT 24VDC 1CO LED	8871010000	RCIKIT 24VAC 1CO LED	8871020000	RCIKIT 230VAC 1CO LED
1 CO, 16A	PUSH IN	8897120000	RCIKITP 24VAC 1CO LD	8871130000	RCIKITP 24VAC 1CO LED	8897140000	RCIKITP 230VAC 1CO LD
1 CO, 16 A / test button	Screw	8881580000	RCIKIT 24VDC 1CO LD/PB	8881590000	RCIKIT 24VAC 1CO LD/PB	8881600000	RCIKIT 230VAC 1CO LD/PB
1 CO, 16 A / test button	PUSH IN	8897190000	RCIKITP 24VDC 1CO LD/PB	8897200000	RCIKITP 24VAC 1CO LD/PB	8897220000	RCIKITP 230VAC 1CO LD/PB
2 CO, 8A	Screw	8871030000	RCIKIT 24VDC 2CO LED	8871040000	RCIKIT 24VAC 2CO LED	8871050000	RCIKIT 230VAC 2CO LED
2 CO, 8A	PUSH IN	8897150000	RCIKITP 24VDC 2CO LD	8897160000	RCIKITP 24VAC 2CO LD	8897180000	RCIKITP 230VAC 2CO LD
2 CO, 8 A / test button	Screw	8881610000	RCIKIT 24VDC 2CO LD/PB	8881620000	RCIKIT 24VAC 2CO LD/PB	8881630000	RCIKIT 230VAC 2CO LD/PB
2 CO, 8 A / test button	PUSH IN	8897230000	RCIKITP 24VDC 2CO LD/PB	8897240000	RCIKITP 24VAC 2CO LD/PB	8897260000	RCIKITP 230VAC 2CO LD/PB

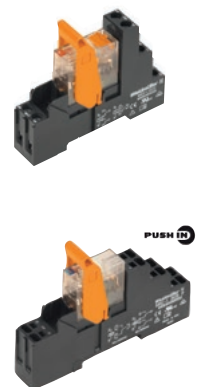

RIDERSERIES RCM relay KITS 2 CO (12 A) / 3 CO (10 A) / 4 CO (6 A)							
Load side	Base	24 V DC		24 V AC		230 V AC	
2 CO, 12 A / test button	Screw	8920940000	RCMKIT-I 24VDC 2CO LD	8920950000	RCMKIT-I 24VAC 2CO LD	8920970000	RCMKIT-I 230VAC 2CO LD
2 CO, 12 A / test button	PUSH IN	8921080000	RCMKITP-I 24VDC 2CO LD	8921090000	RCMKITP-I 24VAC 2CO LD	8921110000	RCMKITP-I 230VAC 2CO LD
3 CO, 10 A / test button	Screw	8920980000	RCMKIT-I 24VDC 3CO LD	8920990000	RCMKIT-I 24VAC 3CO LD	8921020000	RCMKIT-I 230VAC 3CO LD
4 CO, 6 A / test button	Screw	8921030000	RCMKIT-I 24VDC 4CO LD	8921040000	RCMKIT-I 24VAC 4CO LD	8921060000	RCMKIT-I 230VAC 4CO LD
4 CO, 6 A / test button	PUSH IN	8921120000	RCMKITP-I 24VDC 4CO LD	8921130000	RCMKITP-I 24VAC 4CO LD	8921150000	RCMKITP-I 230VAC 4CO LD



RIDERSERIES FG relay with positively-driven contacts			
Load side	Base	24 V DC	
2 CO positively driven, 6 A	Screw	1218410000	RCIKIT 24VDC 2CO LD/FG
2 CO positively driven, 6 A	Tension clamp	1218390000	RCIKITZ 24VDC 2CO LD/FG




You can find further products at catalogue.weidmueller.com

TERMOPTO, TERMSERIES, MICROOPTO – Solid-state relays

TERMOPTO solid-state relays offer a compact wear-free and maintenance-free alternative to electromechanical relays. PUSH IN connections and pluggable cross-connections reduce wiring effort by > 50%.

The different variations of TERMSERIES solid-state relays enable universal use in many applications. Extensive cross-connection options, optional multi-voltage input and the choice between screw and tension clamp connections are special features of this product line.

The MICROOPTO family offers high-quality solid-state relays for application-oriented solutions to problems. International approvals permit their use worldwide.

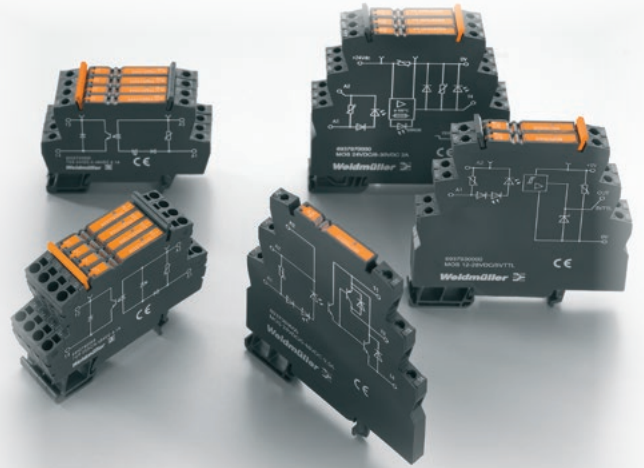

TERMOPTO (solid-state relays in terminal design, width 6.1 mm)

Load side	Connection system	24 V DC		24 V AC		230 V AC	
5-48 VDC / 0.1 A	Screw	8950720000	TOS 24VDC/48VDC 0,1A	8950820000	TOS 24VAC/48VDC 0,1A	8950850000	TOS 230VAC/48VDC 0,1A
5-48 VDC / 0.1 A	PUSH IN	8950780000	TOP 24VDC/48VDC 0,1A	8950860000	TOP 24VAC/48VDC 0,1A	8950890000	TOP 230VAC/48VDC 0,1A
5-48 VDC / 0.5 A	Screw	8950920000	TOS 24VDC/48VDC 0,5A	8951020000	TOS 24VAC/48VDC 0,5A	8951050000	TOS 230VAC/48VDC 0,5A
5-48 VDC / 0.5 A	PUSH IN	8950980000	TOP 24VDC/48VDC 0,5A	8951060000	TOP 24VAC/48VDC 0,5A	8951090000	TOP 230VAC/48VDC 0,5A
3-33 VDC / 4 A	Screw	1275100000	TOS 24VDC/24VDC 4A				
3-33 VDC / 4 A	PUSH IN	1254880000	TOP 24VDC/24VDC 4A				
24-230 VAC / 0.1 A	Screw	8951120000	TOS 24VDC/230VAC 0,1A	8951220000	TOS 24VAC/230VAC 0,1A	8951250000	TOS 230VAC/230VAC 0,1A
24-230 VAC / 0.1 A	PUSH IN	8951180000	TOP 24VDC/230VAC 0,1A	8951260000	TOP 24VAC/230VAC 0,1A	8951290000	TOP 230VAC/230VAC 0,1A



TERMSERIES (solid-state relay with pluggable SSR modules, width 6.4/12.8 mm)

Load side/width	Connection system	24 V DC		24 V AC		230 V AC	
3-33 VDC, 2 A / 6.4 mm	Screw	1127170000	TOS 24VDC 24VDC2A	1127180000	TOS 24VAC 24VDC2A	1127240000	TOS 230VAC RC 24VDC2A
3-33 VDC, 2 A / 6.4 mm	Tension clamp	1127290000	TOZ 24VDC 24VDC2A	1127300000	TOZ 24VAC 24VDC2A	1127370000	TOZ 230VAC RC 24VDC2A
24-230 VAC, 1 A / 6.4 mm	Screw	1127410000	TOS 24VDC 230VAC1A	1127420000	TOS 24VAC 230VAC1A	1127490000	TOS 230VAC RC 230VAC1A
24-230 VAC, 1 A / 6.4 mm	Tension clamp	1127530000	TOZ 24VDC 230VAC1A	1127540000	TOZ 24VAC 230VAC1A	1127610000	TOZ 230VAC RC 230VAC1A
3-33 VDC, 5 A / 12.8 mm	Screw	1127630000	TOS 24VDC 24VDC3,5A			1127640000	TOS 24-230VAC 24VDC3,5A
3-33 VDC, 5 A / 12.8 mm	Tension clamp	1127650000	TOZ 24VDC 24VDC3,5A			1127670000	TOZ 24-230VAC 24VDC3,5A
3-33 VDC, 3.5 A / 12.8 mm	Screw	1990960000	TOS 24VDC 24VDC5A			1990970000	TOS 24-230VAC 24VDC5A
3-33 VDC, 3.5 A / 12.8 mm	Tension clamp	1990980000	TOZ 24VDC 24VDC5A			1990990000	TOZ 24-230VAC 24VDC5A



MICROOPTO (solid-state relays for special applications, screw connection, width 6.1 mm)

5-33 VDC / 10 A	8937940000	MOS 24VDC/5-33VDC 10A	Switching of inductive DC loads up to 10 A, integrated overload protection and signal contact
8-30 VDC / 2 A	8937970000	MOS 24VDC/8-30VDC 2A	Switching of solenoid valves up to 2 A, integrated short circuit and overload protection
12-300 VDC / 1 A	8937830000	MOS 24VDC/12-300VDC 1A	Switching amplifier for DC loads up to 300 V, 1 A
20-28 VDC / 50 mA	8937990000	MOS 12-28VDC 100kHz	Switching frequencies up to 100 kHz
24 VDC / 0.1 A	8937920000	MOS 5VTTL/24VDC 0,1A	Input 5 V TTL logic / output 24 V DC, 100 mA
5 V TTL	8937930000	MOS 12-28VDC/5VTTL	Input 12... 28 V DC / output 5 V TTL logic, 50 mA



IT TIMER (timing relay with 7 timing functions, screw connection, width 17.5 mm)

Output / PU	24...48 V DC / 24...230 V AC	
1 CO, 5 A / 1 Stück	2496190000	ITS 24-240VUC 1CO M7C
1CO, 5 A / 10 Stück	2545120000	ITS 24-240VUC M7C PU10



Power solid-state-relay (solid-state contactor, screw connection)

Output	Output switching behaviour	24 V DC		230 V AC		Design / installation
12-275 V AC/25 A/single-phase	zero-cross switching	1406200000	PSSR 24VDC/1PH AC 25A	1406220000	PSSR 230VAC/1PH AC 25A	with mounted heat sink / TS 35 installation
24-510 V AC/35 A/single-phase	zero-cross switching	1406210000	PSSR 24VDC/1PH AC 35A			with mounted heat sink / TS 35 installation
24-510 V AC/22 A/single-phase	Instantaneous switching	2531050000	PSSR 24VDC/1PH AC 22A I			with mounted heat sink / TS 35 installation
24-520 V AC/20 A/three-phase	zero-cross switching	8952130000	PSSR 24VDC/3PH AC 20A	8952140000	PSSR 230VAC/3PH AC 20A	with mounted heat sink / TS 35 installation
24-600 V AC/50 A/single-phase	zero-cross switching	1406240000	PSSR 24VDC/1PH AC50A HP			without heat sink / for direct installation
24-600 V AC/75 A/single-phase	zero-cross switching	1406250000	PSSR 24VDC/1PH AC75A HP			without heat sink / for direct installation



You can find further products at [catalogue.weidmuller.com](https://www.weidmuller.com)

Weidmüller – Your partner in Industrial Connectivity

As experienced experts we support our customers and partners around the world with products, solutions and services in the industrial environment of power, signal and data. We are at home in their industries and markets and know the technological challenges of tomorrow. We are therefore continuously developing innovative, sustainable and useful solutions for their individual needs. Together we set standards in Industrial Connectivity.

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
32758 Detmold, Germany
T +49 5231 14-0
F +49 5231 14-292083
www.weidmueller.com

Personal support can
be found on our website:
www.weidmueller.com/contact

Made in Germany



Order number: 2654650000/11/2018/SRM